

राष्ट्रीय बैंक स्टाफ महाविद्यालय
NATIONAL BANK STAFF COLLEGE

लखनऊ
सेक्टर - एच,
एल.डी.ए.कालोनी,
कानपुर रोड,
लखनऊ - 226 012
फैक्स : 0522-2421035
फोन : 2421052, 041, 065
तार : "एग्रीकेडेमी", लखनऊ
ई-मेल : nbsc@sancharnet.in

LUCKNOW
Sector-H
L.D.A. Colony,
Kanpur Road,
Lucknow - 226 012
Fax : 0522-2421035
Phone : 2421052, 041, 065
Grams : "AGRICADEMY", LKO
e-Mail : nbsc@sancharnet.in

सं.रा.बैं.स्टा.महा.लख./
दिनांक : 31 July 2009

/ परिसर अनुभाग - Water Recycling / 2009 - 10

(For empanelled contractors)

प्रिय महोदय

राष्ट्रीय बैंक स्टाफ महाविद्यालय - Recycling of kitchen waste water and related works

- 1 उक्त कार्य के लिए एस ओ क्यू विवरण में निर्दिष्ट व उक्त कार्य के लिए संलग्न शर्तों के अनुसार भावदरें (कोटेशन) प्रस्तुत करने के लिए आप आमंत्रित हैं.
- 2 पूरे कार्य की अनुमानित लागत रूपरु **1,06,000/-** है और कार्य सौंपने के 10 वें दिन के बाद 60 दिनों के भीतर इसे पूरा किया जाना है.
3. श्री वी. श्रीनारायणन, प्रधानाचार्य, राष्ट्रीय बैंक स्टाफ महाविद्यालय , सेक्टर एच, एलडीए कॉलोनी, कानपुर रोड, लखनऊ- 226012 को सम्बोधित पूर्ण टेण्डर, स्टाफ महाविद्यालय के भूतल पर स्थित प्रधानाचार्य के सचिवालय में इस प्रयोजन हेतु रखे गए टेण्डर बाक्स में दिनांक **21 August 2009 को अपराह्न 3.00 बजे तक** जमा करवाए जा सकते हैं तथा टेण्डर प्रस्तुतकर्ताओं अथवा उनके प्रतिनिधियों की उपस्थिति में उसी दिन अपराह्न 3.30 बजे टेण्डर खोले जाएंगे.
4. राष्ट्रीय बैंक स्टाफ महाविद्यालय, लखनऊ के पक्ष में देय डिमाण्ड ड्राफ्ट के माध्यम से **रुपरु 2100/-** बयाने की राशि (Earnest Money Deposit) मुहरबन्द लिफाफे में कोटेशन के साथ जमा करवाई जानी चाहिए. निर्धारित समय तक प्राप्त सभी टेण्डर खोले जाएंगे लेकिन बयाने की राशि के बिना प्राप्त टेण्डर नामंजूर कर दिए जाएंगे. चेक के माध्यम से बयाने की राशि स्वीकार नहीं की जाएगी. सफल टेण्डरकर्ता की बयाने की राशि जमानत जमा / प्रतिधारण राशि (retention money)

के रूप में रख ली जाएगी. इस राशि पर कोई ब्याज देय नहीं होगा. उपर्युक्त समय व तिथि के पश्चात् प्राप्त टेण्डर नामंजूर किए जा सकते हैं.

5. राष्ट्रीय बैंक स्टाफ महाविद्यालय न्यूनतम अथवा अन्य कोई टेण्डर स्वीकार करने को बाध्य नहीं है तथा प्राप्त हुए किसी भी अथवा सभी टेण्डरों को बिना कोई कारण बताए नामंजूर करने, उन पर मोलभाव करने तथा काम को बाँटने का अधिकार उसके पास सुरक्षित रहेगा.
6. मूल्य बोली (price bid) खोले जाने की तिथि से न्यूनतम 90 (नब्बे)दिन के लिए टेण्डर वैध रहेगा.
7. जो टेण्डर उपर्युक्त शर्तों में से किसी या सभी शर्तों को पूरा नहीं करते अथवा जो किसी भी दृष्टि से अपूर्ण हैं, नामंजूर किए जा सकते हैं.
8. मूल्य बोली में दरें अंकों व शब्दों दोनों में दी जानी चाहिए तथा इन दोनों में कोई विसंगति होने की स्थिति में शब्दों में लिखी गई राशि मान्य होगी.
9. बैंक द्वारा टेण्डरकर्ता को टेण्डर मंजूर हो जाने की सूचना जारी होते ही यह करार टेण्डरकर्ता (tenderer) पर बाध्यकारी (binding) हो जाएगा.

भवदीय

(मुकेश वत्स)
सहायक महाप्रबन्धक

Encl. : 1) General terms & conditions
2) Schedule of Quantity
3) Drawing

National Bank Staff College- Recycling of kitchen waste water and related works at NBSC, Lucknow

General Terms & conditions

1. The Tenderers are requested to inspect the site (National Bank Staff College, Sector-H, LDA Colony, Kanpur Road, Lucknow - 226 012) and obtain for themselves at their own expense all necessary information and particulars to enable them to submit the tender.
2. The time of completion shall be **60 days** which shall be reckoned from 10th day of the date of work order.
3. The defects liability period shall be **one year** from date of completion.
4. The RMD@5% shall be deducted from the bill of contractor which will be released after completion of defects liability period.
5. Tax deduction at source as per rules would be done from the payments.
6. The contractor will follow all the applicable labour laws.
7. The quoted rates shall be inclusive of carting away debris to nearest municipal dump & cleaning the site, floors, doors, windows, glasses etc.
8. The EMD of **Rs. 2100/-** shall be deposited by demand draft payable to **National Bank Staff College**.
9. All materials shall be got approved from Bank before start of work.
10. Measurements shall be taken according to IS:1200 unless otherwise specified.
11. Any extra item required for proper completion of work shall be got approved from the Bank & shall be paid on actual cost of labour & materials plus 15% towards overheads & profit .
12. The dispute, if any, shall be resolved as per Arbitration & Reconciliation Act.
13. No payment shall be made for defective work.
14. **All payments will be done after satisfactory completion of work and submission of bills therefor.** The contractor will submit bill with measurement sheets. No bills, without measurements shall be accepted.
15. The quoted rates shall remain valid for acceptance for 90 days from the date of opening of quotation.
16. Bank reserves the right to accept or reject any tender .
17. The quantities in the BOQ are indicative & can increase or decrease during execution of work, no claim on this account shall be admissible.

18. The contractor will quote rates according to SOQ, incomplete or partly filled tenders shall be rejected.
19. The work has to be carried out in co-ordination with the work of other agencies. A Supervisor is to be posted at site for taking instructions and should be capable of discussing and taking decisions at site.
20. Rates quoted shall include cost of materials, labour, wastages, transportation, scaffolding, tools and plants required to carryout the job and shall also include all taxes and levies charged by state / central / local authorities.
21. The entire area shall be cleaned from debris & loose material etc.
22. All the safety precautions should be taken while executing the work.
23. The workman shall be allowed to work during office hours i.e. after 9.00 a.m.to 6.00 pm. On holidays / Sundays work may be allowed round the clock and whenever requested by the Contractor. The contractor shall require to obtain prior permission and work passes for all labourers to carry out the work from the Department. The contractor shall quote rates for all items of work accordingly. No extra claim will be entertained whatsoever.

Place:
Date:

Signature of contractor
with seal & address

BOQ for Water Recycling


S. No.	Particulars	Unit	Qty.	Rate	Amount
1.	Earth work in excavation by manual means including disposal of excavated earth, lead upto 200 mts. & lift upto 1.8 m disposed earth to be leveled & dressed (all kind of soil)	M ³	40.0		
2.	Providing and laying in position cement concrete 1:4:8 (1 cement : 4 coarse sand : 8 graded stone aggregate 40 mm derem below plinth level.	M ³	2.5		
3.	Filling crushed stone aggregate (mix of all size) & compaction.	M ³	1.5		
4.	Brick work in cement mortar (1:4)	M ³	9.6		
5.	Plastering 15 mm thick with cement mortar (1:3) with a floating coat of neat cement.	M ²	30.0		
6.	Construction of brick chamber 75 X 75 X 60 cm as per drawing complete.	No.	2		
7.	P/F C. I. Pipe conforming to IS:1536, 100 mm dia including excavation, back fitting, cutting of wall, lead jointing complete	M	20.0		
8.	P/F G.I. Pipe with all fittings including cutting chases in brick wall & making good as the plaster. a. 15 mm dia b. 25 mm dia c. 32 mm dia	M M M	5 10 10		
9.	P/F PVC pipe ISI marked 40 dia for disposal of waste water including fittings and cutting floor and making good the as same.	M	8		
10.	P/F G. I. suction pipe 50 mm dia with fitting	M	1.8		
11.	P/F C.I. jail 150 dia to fixed with floor	No.	2		
12.	P/F C.I. Nahri trap (100 dia) for disposal of water including cutting of floor making good complete.	No.	1		
13.	Costruction of brick over flow chamber of 60cm X 60cm X 45cm with RCC cover plastered inside	No.	1		
14.	Dismantling of old brick work	LS	1		

15.	P/F wall tiles of approved make group 4 after dismantling the plaster over a bed mortar of 12 mm & finished with matching pigment.	M ²	16.0		
16.	Repainting with oil bound distemper two coats over a coat of primer	M ²	30.0		
17.	S/F sewage pump – Supply & fixing of self priming centrifugal dewatering pump suitable for handling muddy water / contaminated water with solids upto 15.5 mm of approved make with suitable pump motor of 2 hp and require accessories – approved make – Kirloskar/ KSB/ Crompton Greaves	Set	1		
TOTAL >					

Total (in words) :

Place :
Date :

Signature of Contractor with seal

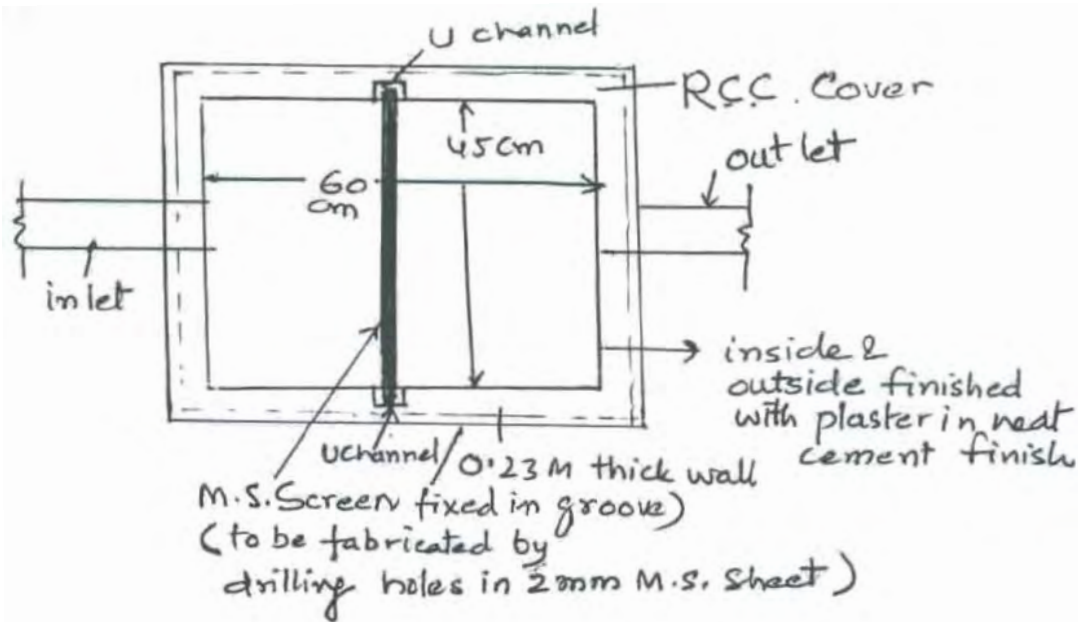

Chamber for screening of flow